





Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 20/6

Customer part no.:
SKNY268-6-24-14

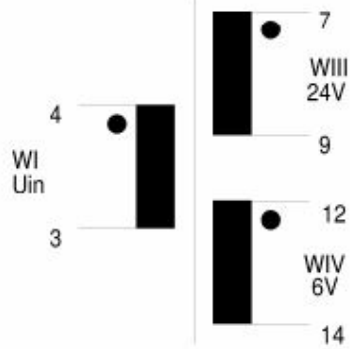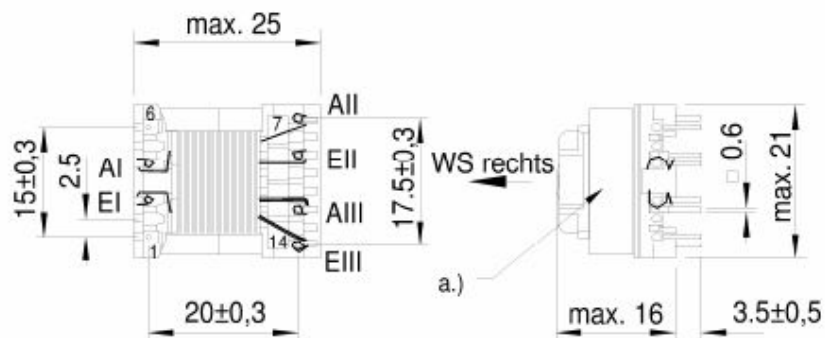

Core / material / air gap / AL	E20/6 K2006 or equiv m.L.0,2	
Nominal inductance	LI=1,10mH±10%	
maximum transmissible power	19 W	
Working frequency	60...140 kHz	
Transformation ratio	81:19:4	
dielectric strength (50Hz/2s)	WI-WII/WIII=4kVeff	
Nominal Current		
Design in comp. with standard	S08	
Working / storage temperature	-40 °C- 125 °C	-40 °C- 85 °C
Miscellaneous		